

TECHNICAL SPECIFICATIONS

ANALYTICAL MODES

Manual, Predilute, Capillary

TOTAL PARAMETERS

22 : WBC, RBC, HGB, HCT, MCV MCH, MCHC, RDW-CV, RDW-SD, PLT, MPV, PCT, PDW-CV, PDW-SD, P-LCR, P-LCC, Lymph%/#, Mid %/#, Gran %/#

PRINCIPLE OF MEASUREMENT

RBC/PLT/WBC/ DIFF:
Electrical Impedance
Hb: Cyanide Free Colorimetry
MCV: Measured
HCT: Calculated

HISTOGRAMS

3 (WBC/RBC/PLT)

SAMPLE VOLUME

Whole Blood : 9 µL
Pre-diluted : 20 µL
Capillary : 20 µL

LINEARITY RANGE

WBC ($\times 10^3/L$): 0 – 300
RBC ($\times 10^6/L$): 0.00 – 8.50
Hb (g/dL): 0 – 25.0
HCT (%): 0 – 67
PLT ($\times 10^3/L$): 0 – 3000

CALIBRATOR

ELite H Cal (3mL)
Open Vial Stability at 2-8°C: 7 Days

TRI-LEVEL CONTROLS

Erba H3 CON L, N, H (3mL)
Open Vial Stability at 2-8°C: 14 Days

THROUGHPUT

60 Tests/Hr

QC (L-J, X-BAR)

Yes

DATA STORAGE

50,000 Results with Graphs

DIMENSION (MM)

364x477x417

WEIGHT (KG)

25

REAGENTS

Erba Dil
ERBA Lyse Cyanide Free
ELite H Clean

INTERFACES

4 USB + 1 LAN Port

OPERATING ENVIRONMENT

15-30°C
Atmospheric pressure
70kPa~106kPa

POWER REQUIREMENT

A.C.100~240V; -50/60Hz;
≤200VA

H360 ORDER DETAILS

CAT. NO.	REG. NO.	PRODUCT NAME	DESCRIPTION
INS00077	50005215	H360	3 Part Differential

H-SERIES REAGENTS

CAT. NO.	REG. NO.	PRODUCT NAME	VOLUME
HEM00028	50005219	Erba H360 Diluent	20 Litres
HEM00029	50005220	Erba H360 Lyse	500 mL
HEM00023	50004878	ELite H Clean	50 mL
HEM00033	10020557	Erba H3 CON Low	3 mL
HEM00034	10020558	Erba H3 CON Normal	3 mL
HEM00035	10020559	Erba H3 CON High	3 mL
HEM00027	10020492	ELite H CAL	3 mL



EASY.
EFFICIENT.
RELIABLE.



Erba Lachema s.r.o.
Karásek 2219/1d, 621 00 Brno, Czech Republic
Phone: +420 517 077 111
E-mail: sales@erbamannheim.com
www.erbamannheim.com


TOTAL SOLUTIONS FOR CLINICAL DIAGNOSTICS

Version No 1.1

H360

FULLY AUTOMATED 3 PART
HEMATOLOGY ANALYSER

EASY USER INTERFACE

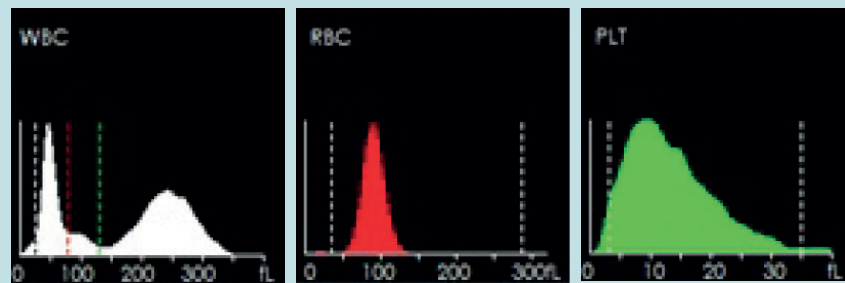

- 10.4" Touchscreen
- 50,000 Reports
- 3 Histograms (RBC, WBC, PLT)
- 1-click analysis

REAGENT REGISTRATION

- Full traceability via RFID inventory management system



RELIABLE ENGINEERED CONSTRUCTION




- Small footprint - 364 x 477 mm
- Status indicator
- Simple, well engineered construction
- High quality components for long life

ANTI-CLOG TECHNOLOGY


- Prevent build-up with anti-clog technology



EFFICIENT EXTERNAL CONNECTIONS

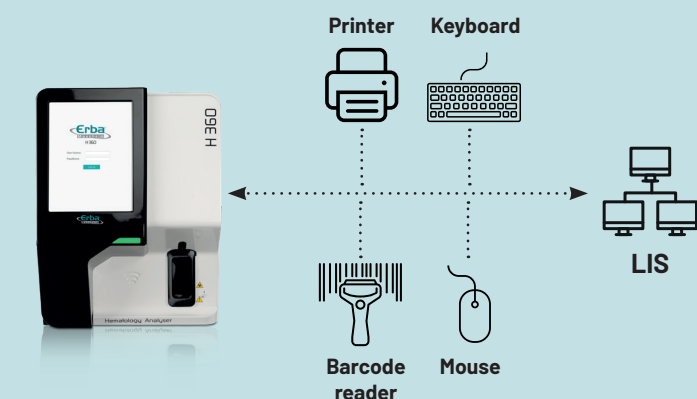

ANALYTICS

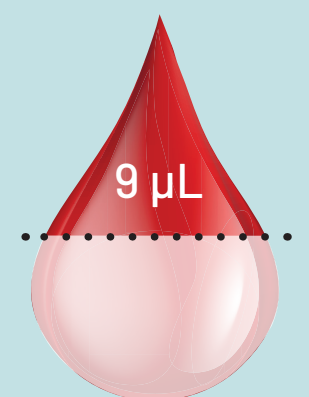

- Low aspiration volume 9 µL
- 22 reportable parameters
- Guaranteed dilution accuracy via automatic diluent dispensing
- Advanced platelet analysis (P-LCR, P-LCC, PDW-SD, PDW-CV)
- Automatic floating discriminations

DESIGN

- Built-in thermal printer

